



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

10/522564
PCT/IB 03/03063

09.07.03

10 Rec'd PCT/PTO

26 JAN 2005

REC'D 06 AUG 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02291935.1

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr.:
Application no.: 02291935.1
Demande no:

Anmeldetag:
Date of filing: 31.07.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Method and encoder for encoding a digital video signal

In Anspruch genomene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04N7/26

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

FIELD OF THE INVENTION

The present invention relates to a method for encoding a digital video sequence, said digital video sequence comprising some sets of images including disparity maps, a disparity map being used to reconstruct one image of a set of images from a reference image of said set of images. The invention also relates to an encoder, said encoder implementing said method.

Such a method may be used in, for example, a video communication system for 3D video applications within MPEG standards.

BACKGROUND OF THE INVENTION

A video communication system typically comprises a transmitter with an encoder and a receiver with a decoder. Such a system receives an input digital video sequence, encodes said sequence via the encoder, transmits the encoded sequence to the receiver, then decodes the transmitted sequence via the decoder resulting in an output digital video sequence, which is the reconstructed sequence of the input digital video sequence. The receiver then displays said output digital video sequence. A 3D digital video sequence comprises some sets of images with objects, usually one first set of texture images along with another set of images called disparity images or disparity maps. An image comprises some pixels.

Each image of the digital video signal is encoded along different general coding schemes, which have already been proposed within the scope of MPEG. For example, the MPEG2 standard referenced "Draft amendment N°3 to 13818-2 Multi-view profile-JTC1/SC29/WG11N1088" edited by ISO/IEC in November 1995 during the MPEG Meeting of Dallas (Texas), has set the basis for the encoding of different views of a same video sequence. The main principle are not only, as in most traditional video coding schemes, to use temporal and spatial redundancies within one video sequence, but also to use redundancies between the different points of view within a video sequence, wherein each point of view is an image, a left image and a right image catch respectively by a left camera and a right camera for example. As objects of a video sequence seen from two slightly different points of view do not differ very much, it is possible to predict a large part of points of view from reference points of view by virtue of prediction vectors also called disparity vectors.

Since it is always possible to have disparity vector that are all along the same direction, it is often supposed that there is only horizontal disparity vectors. In this case, a disparity vector is defined by a single value, called disparity value. The disparity map is an image in which to every pixel is associated a disparity value.

These disparity values are encoded by the encoder and transmitted to the decoder. A reference image is also sent to the decoder, for example the left one. Said decoder will use, amongst other parameters, the disparity values to reconstruct the right image from the reference image.

Various encoding schemes well known by the person skilled in the art exist like DCT based, loss less run-length coding or mesh-based can be used to encode an image. In all these encoding schemes, usually the disparity values are encoded on n-integers values, often on 8 bits data representing 256 gray levels.

One inconvenient of these encoding schemes is that at the receiver side, one doesn't know exactly how to translate the disparity map of a texture image solely from these gray levels data.

Indeed, depending on a video sequence's content, the disparity map of a texture image can change dramatically and hence the translation.

If the video sequence contains only objects filmed at very closed distance, disparity may need to be quite accurate, with sub-pixel accuracy. On the contrary, if the camera focuses on pretty far objects, sub-pixel accuracy might be of no interest, whereas there might be some very large values of disparity. Finally, there might be a mixed situation, with different regions of interests within the scene and a need of non-linear varying set of values of disparity.

Therefore because of this problem of translation of the disparity map of the prior art is that, at the receiver side, there is often a manual tuning of the 3D display in order:

- to view correctly in 3D so that a reconstructed image is equal to, or have few distortions compared to the original one and so the reconstructed video sequence, and/or
- to view correctly in 3D a second 3D video sequence after a previous 3D video sequence, sent by 2 different broadcasters for example, if those 2 video sequences have totally different disparity values associated.

And, if the manual tuning has to be done very often, it will cause some great discomfort for a viewer of a 3D video sequence.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the invention to provide a method and an encoder for encoding a digital video sequence, said digital video sequence comprising some sets of images including disparity maps, a disparity map being used to reconstruct one image of a set of images from a reference image of said set of images, which allow a precise translation of the disparity map.

To this end, there is provided a method comprising the steps of:

- encoding a type of the disparity map to use for the reconstruction of an image, and
- encoding the disparity map.

In addition, there is provided an encoder comprising first encoding means adapted for encoding a type of the disparity map to use for the reconstruction of an image, and second encoding means for encoding the disparity map.

As we will see in detail further on, by encoding the type of the disparity map, and more precisely by encoding the way to compute the disparity values from the 8 bits of gray levels, the disparity map of 3D video sequences is efficiently represented and the processing of disparity map on the Display side of the video chain is made automatically.

BRIEF DESCRIPTION OF THE DRAWINGS

Additional objects, features and advantages of the invention will become apparent upon reading the following detailed description and upon reference to the accompanying drawings in which:

- Fig. 1 illustrates a video communication system comprising an encoder and a decoder according to the invention, and
- Fig. 2 is schematic diagram of the method of encoding performed by the encoder of Fig. 1.

DETAILED DESCRIPTION OF THE INVENTION

In the following description, well-known functions or constructions by the person skilled in the art are not described in detail since they would obscure the invention in unnecessary detail.

The present invention relates to a method for encoding a digital video sequence, said digital video sequence comprising some sets of images, usually one first set of texture images along with another set of images called disparity images or disparity maps. A disparity map is used to reconstruct one image of a set of texture images from a reference image of said set of texture images.

Such a method may be used within a video communication system SYS for 3D video applications in MPEG2 or MPEG4, wherein said video communication system comprises a transmitter TRANS, a transmission medium CH and a receiver RECEIV. Said transmitter TRANS and said receiver RECEIV comprise an encoder ENC and a decoder DEC respectively.

In order to transmit efficiently some video sequences through the transmission medium CH, said encoder ENC applies an encoding on a video sequence, then the encoding video sequence is sent to a decoder DEC, which decodes said sequence. Finally the receiver RECEIV displays said video sequence.

A 3D video sequence comprises some sets of images with objects, wherein an image is represented by a plurality of pixels.

One object of a video sequence seen from two slightly different points of view does not differ very much. Therefore, a large part of points of view are predicted from reference points of view by virtue of prediction vectors also called disparity vectors.

Since it is always possible to have disparity vectors that are all along the same direction – by rectification of the original stereo pair according to epipolar constraints for example - it can be supposed that there are only horizontal disparity vectors (the common case of a "parallel stereo setting" of video cameras). In this case, a disparity vector is defined by a single value, called disparity value. In the remainder of the description, a disparity vector will be referred to a disparity value. Of course, this should be in no way restrictive. The disparity map is an image in which to every pixel is associated a disparity value.

These disparity values allows to define the shifting of a pixel of an object between a reference image and another image, at a time t , for example when the two said images represent two different points of view of a same scene of the video sequence. The two points of view of a scene are issued by two cameras video placed at different spots.

In order to be efficiently coded by compression algorithms, the disparity values are represented by n -integers values, often on 8 bits data representing 256 gray levels. The main issue is that the translation between the encoded n -integer values and the disparity values can be of different types.

The disparity map also relates to the depth of the objects of an image. Roughly, in most classic representations of 3D images, the more an object is far in a reference image (its depth is big), the less the movements of said object will be apparent in the reconstructed image. On the contrary, the more an object is near in the reference image, the more the movements of said object will be apparent in the reconstructed image.

In order to reduce the information that are transmitted via the transmission medium, redundancies between points of view are used. Thus, as objects seen from two different points of view do not differ very much, it is possible to predict one point of view from the other one. One point of view, the reference one, will be encoded and sent via the transmission medium CH to the receiver RECEIV. Said receiver RECEIV will decodes it,

reconstruct the original reference point of view and deduce the other point of view from the reference one thanks to the disparity vectors or values associated to said reference point of view.

5 The encoder ENC comprises first encoding means adapted for encoding a type of a disparity map to use for the reconstruction of an image, and second encoding means for encoding the disparity map.

10 The encoding of a video sequence is done as following and is illustrated by the Fig.

2.

15 In a first step 1), the type of the disparity map is encoded, wherein the type represents the way the disparity values are to be translated, i.e. computed. In a non-limitative embodiment, a flag C1 encodes said type of disparity map. In a first variant mode of said embodiment, said flag C1 is set for each image within a video sequence. In a second variant mode of said embodiment, said flag C1 is set for a group of images, for example in the header of a group of images, said header being defined in the standard MPEG2

referenced "ISO/IEC 13818-2:2000 Information technology -- Generic coding of moving pictures and associated audio information: Video".

20 This group of images, also referred as GOP "Group Of Pictures", would have the particularity of having a same disparity map representation, i.e. the disparity values are computed in the same manner. The type flag can be coded on 3 bits for example to represent the disparity map. It can also have a variable length.

The following non-limitative representations can be applied for the disparity map: affine, logarithmic, polynomial, piecewise planar.

25 For example, in case of an affine representation, the disparity value is computed with the following formula.

30 Disparity value = $(N_integer - Shift) / Dynamic$, wherein *N_integer* represents the 256 gray levels coded on 8 bits, *Shift* represents the 3D stereoscopic character of an image in relation to a user of the video system like a television (3D image giving the impression of being "in" or "out" of the screen), coded on 8 bits, and *Dynamic* represents the depth of the objects amongst them, coded on 4 bits.

In a second step 2), if the representation of the disparity map representation needs some parameters those parameters are also encoded.

35 For example, in the case of the affine representation, the shift and the dynamic values are two parameters P1 and P2 that are encoded.

In a third and last step 3), the disparity map, i.e. the gray levels, is encoded with general coding methods like DCT, loss less method, mesh method....

Preferentially, the flag(s) C1 and the associated parameters P1, P2... are put before the encoded disparity map. They are not necessarily transmitted just before the disparity map.

Note that a flag, and as the case may be its associated parameters P1, P2..., are transmitted with the associated image or group of images.

At the decoder DEC side, the knowledge of the type flag will tell said decoder if it has to wait for additional parameters or not.

Thus, one advantage of the present invention is to tell the decoder, and therefore the receiver, how to use exactly the disparity representation on an image to reconstruct an image of a set of texture images from another one.

The use of a flag allows to simply defining the type of a disparity map. Moreover it doesn't use too much memory contrary to the use of a table, which would attribute to each value of the gray levels an explanation about how to move a pixel, for example.

Such a table has also the inconvenient of being transmitted each time the disparity map representation changes, that is to say a lot of bits have to be transmitted.

Another advantage of the present invention is that it improves the reconstruction of a point of view given a reference point of view and the associated disparity map. Indeed, with the flag C1 and, as the case may be, with the parameters, the reconstruction of the reconstructed point of view is more precise and thus, the reconstructed point of view fit more the original point of view. The usage of the flag(s) to explain how the disparity map shall be interpreted allows consistent 3D effects to the viewer, whatever translation function was originally used to encode the disparity values.

Finally, a third advantage of the present invention is that, when it comes to the reconstruction of one view given a reference view and the associated disparity map, we have to fill the holes corresponding to parts of the reconstructed view that are not viewed in the reference view. The width of these holes depends on the dynamic of disparity, therefore on the representation of the disparity map. If one wants to build an enhancement layer of images devoted to the filling of the holes in the reconstructed views, precise references to the way to compute the disparity values is now available.

It is to be understood that the present invention is not limited to the aforementioned embodiments and variations and modifications may be made without departing from the

spirit and scope of the invention as defined in the appended claims. In the respect, the following closing remarks are made.

It is to be understood that the present invention is not limited to the aforementioned 3D video application. It can be use within any application using a system for processing a
5 signal where said signal is characterized by gray levels such as a heating signal.

It is to be understood that the method according to the present invention is not limited to the aforementioned implementation.

There are numerous ways of implementing functions of the method according to the invention by means of items of hardware or software, or both, provided that a single item of
10 hardware or software can carries out several functions. It does not exclude that an assembly of items of hardware or software or both carry out a function, thus forming a single function without modifying the method for processing the video signal in accordance with the invention.

Said hardware or software items can be implemented in several manners, such as by
15 means of wired electronic circuits or by means of an integrated circuit that is suitable programmed respectively. The integrated circuit can be contained in a computer or in an encoder. In the second case, the encoder comprises first encoding means adapted for encoding a type of a disparity map to use for the reconstruction of an image, and second encoding means for encoding the disparity map, as described previously, said means being
20 hardware or software items as above stated.

The integrated circuit comprises a set of instructions. Thus, said set of instructions contained, for example, in a computer programming memory or in an encoder memory may cause the computer or the encoder to carry out the different steps of the decoding method.

The set of instructions may be loaded into the programming memory by reading a
25 data carrier such as, for example, a disk. A service provider can also make the set of instructions available via a communication network such as, for example, the Internet.

Any reference sign in the following claims should not be construed as limiting the claim. It will be obvious that the use of the verb "to comprise" and its conjugations do not
30 exclude the presence of any other steps or elements besides those defined in any claim. The article "a" or "an" preceding an element or step does not exclude the presence of a plurality of such elements or steps.

CLAIMS

1. A method for encoding a digital video sequence (VS), said digital video sequence comprising some set of images including a disparity map, said disparity map being used to reconstruct one image of a set of images from a reference image of said set of images, characterized in that it comprises the steps of:
 - 5 - encoding a type of the disparity map to use for the reconstruction of an image, and
 - encoding the disparity map.
 2. A method of processing a digital video sequence (VS) as claimed in claim 1, characterized in that the encoding of the type of the disparity map is done by a flag.
 3. A method of processing a digital video sequence (VS) as claimed in claim 1, characterized in that the encoding of the type of the disparity map is followed by a set of parameters.
-
4. A computer program product for an encoder (ENC), comprising a set of instructions, which, when loaded into said encoder (ENC), causes the encoder (ENC) to carry out the method claimed in claims 1 to 3.
 5. A computer program product for a computer, comprising a set of instructions, which, when loaded into said computer, causes the computer to carry out the method claimed in claims 1 to 3.
 6. An encoder (ENC) for encoding a digital video sequence (VS), said digital video sequence comprising some sets of images including a disparity map, said disparity map being used to reconstruct one image of a set of images from a reference image of said set of images, characterized in that it comprises first encoding means adapted for encoding a type of the disparity map to use for the reconstruction of an image, and second encoding means for encoding the disparity map.
 7. A video communication system, which is able to receive a digital video sequence (VS), comprising an encoder (ENC) as claimed in claim 6 for encoding said video signal, a transmission channel for transmitting the encoded video signal and a decoder (DEC) for decoding said encoded video signal.

Method and encoder for encoding a digital video signal**ABSTRACT**

5 The present invention relates to a method and an encoder for encoding a digital video sequence, said digital video sequence comprising some sets of images including a disparity map, said disparity map being used to reconstruct one image of a set of images from another image of said set of images. It is characterized in that it comprises the steps of:

- encoding a type of a disparity map to use for the reconstruction of an image, and
- encoding the disparity map.

10 Use: encoder in a video communication system

Reference: Fig. 2

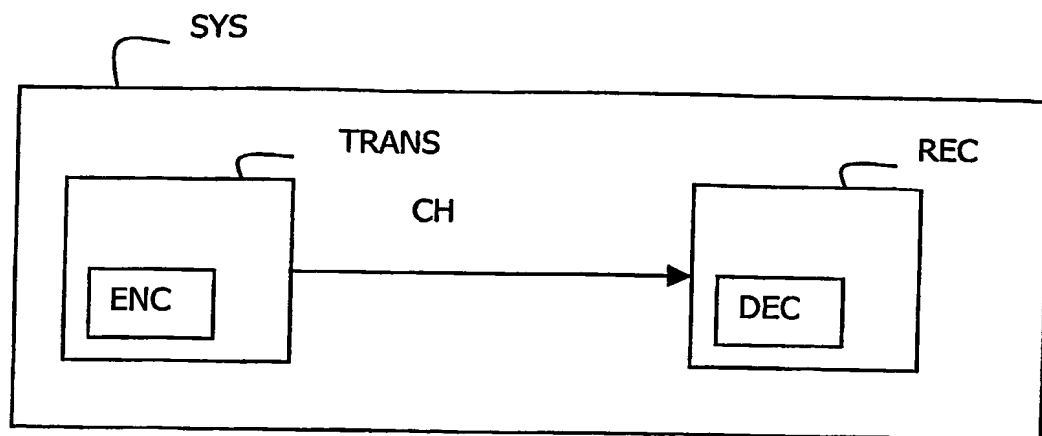


FIG. 1

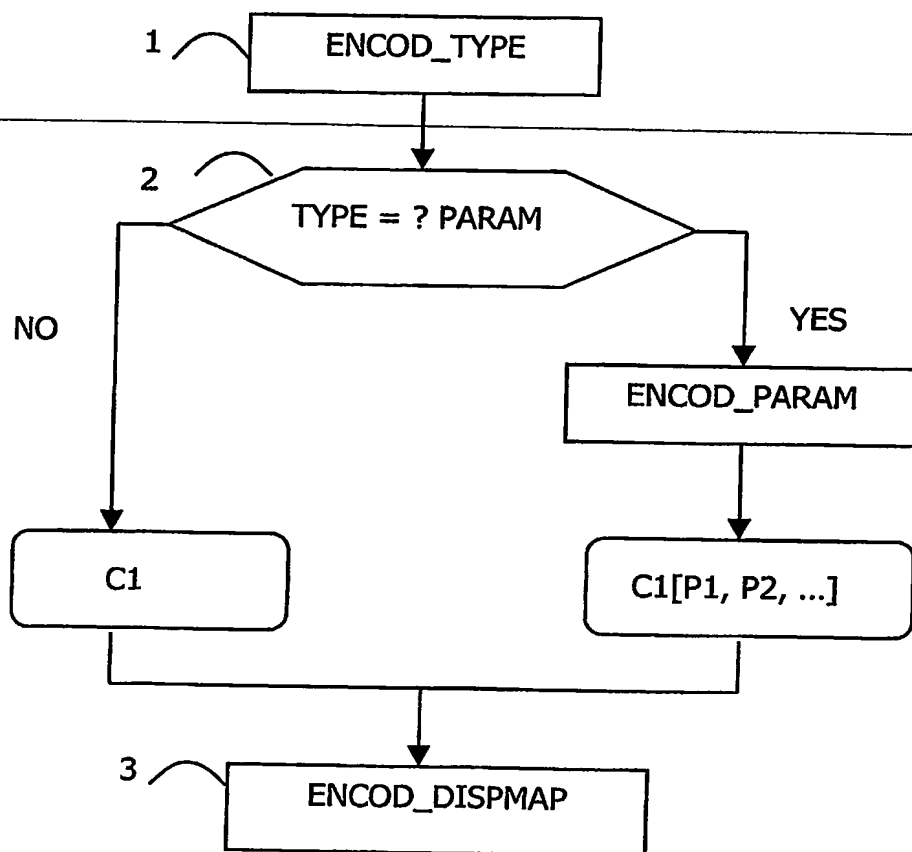


FIG. 2